


Product description

MN25E125-250-4P-50-TM-SS

Pos.no	Description	Item no	Qty.	UP / €	TP / €
1	Close-coupled electric pump according to EN 733 (DIN 24255)				
2	Centrifugal pump: MN25E125-250-4P-50-TM-SS		1	Price on req.	Price on req.
3	<p>Pump bodies</p> <p>Close-coupled electric pumps in compliance with EN 733 - DIN 24255 standards coupled to IEC standard electric motors through rigid coupling.</p> <p>Duty point</p> <p>Flow : / Head :</p> <p>Pump operating data</p> <p>Impeller diameter : 258 mm / Speed : 1.450 1/min</p> <p>Flow : / Head :</p> <p>Shaft power P2 : / Efficiency :</p> <p>Head (Q = 0) : 21,33 m</p> <p>Pump body : Cast iron</p> <p>Impeller : Stainless steel</p> <p>Wear ring : Cast iron</p> <p>Support : Cast iron</p> <p>Coupling : Cast iron</p> <p>Shaft : Stainless steel</p> <p>Max. solid contents : 40 g/m³</p> <p>Max. water temperature : 90 °C</p> <p>Max. running time with Q=0 : 2 min</p>				
4	Motor: IEC 25 - 4		1		
5	<p>Electric motor</p> <p>Three-phase IE3 asynchronous squirrel cage motor.</p> <p>Casing : Cast iron</p> <p>Protection : IP 55</p> <p>Insulation class : F</p> <p>Number of startings : max 14</p> <p>Max environment temperature : 40 °C</p> <p>Max altimetric level : 1000 m</p> <p>Weight : 175 kg</p> <p>Frequency : 50 Hz</p> <p>N. poles : 4</p> <p>P2 : 18,5 kW</p> <p>U : 400 V</p> <p>In 1/1 : 34,3 A</p> <p>EFF : 92,6 %</p> <p>CosPhi : 0,84</p>				
6	Shaft seal: Mechanical seal		1		
7	<p>Cover : Cast iron</p> <p>Spacer : Stainless steel</p> <p>Seal face : Graphite</p> <p>Seat : Ceramic</p> <p>Seal ring : NBR</p> <p>Spring : AISI 304 stainless steel</p>				

Technical data

MN25E125-250-4P-50-TM-SS

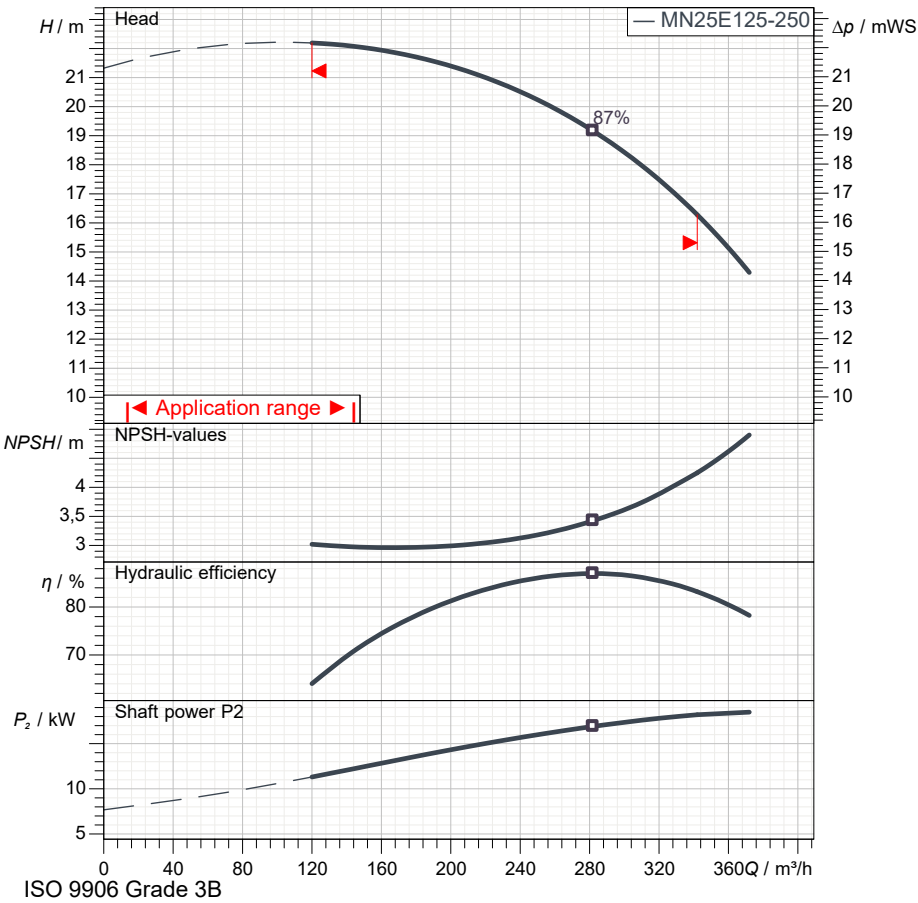

Operating data specification	
Capacity	
Head	
Fluid	Pure water
Type of installation	<Single head pump>

Pump operating data	
Design	MN25E125-250-4P-50-TM-S
Impeller \varnothing	258 mm
Speed	1.450 1/min
Flow	
Head	
Shaft power P_2	
Efficiency	
Head ($Q=0$)	21,3 m
Non return valve loss	

Electric motor technical data	
Design	IEC 25 - 4
Rated power	18,5 kW
Frequency	50 Hz
Number of poles	4
Nominal speed	1.450 1/min
Rated voltage	3~ 400 V
Starting mode	Direct starting
Rated current	34,3 A
Insulation class	F
Degree of protection	IP 55

Use limits	
Max N° startings/hour	14
Max. running time with $Q=0$	2 min
Max. solids contents	40 g/m^3
Max. pumped liquid temperature	90 °C
Maximum density	998 kg/m^3
Maximum viscosity	1 mm^2/s

Materials	
Pump body	Cast iron
Impeller	Stainless steel
Wear ring	Cast iron
Support	Cast iron
Coupling	Cast iron
Shaft	Stainless steel

Shaft seal	
Cover	Cast iron
Spacer	Stainless steel
Seal face	Graphite
Seat	Ceramic
Seal ring	NBR
Spring	AISI 304 stainless steel




Dimensions in mm				Total weight 283 kg			
a	140	Da1	285	E	121	m1	160
A	279	Da2	240	G1	220	m2	120
AB	350	Da3	22	G2	261	n1	400
b	80	Dm1	250	H	180	n2	315
B	241	Dm2	210	h1	250	s1	19
BB	315	Dm3	18	h2	355	x	8
C	580	DNa	150	K	15	y	8
D	280	DNr	125	L	472		

Performance curves

MN25E125-250-4P-50-TM-SS

Performances				
Speed		1.450 1/min	Density	998 kg/m ³
Flow	Min.	120 m ³ /h	Viscosity	1 mm ² /s
	Max.	342 m ³ /h	Temperature	20 °C
Efficiency	Max.	282 m ³ /h	Tolerances	ISO 9906 Grade 3B

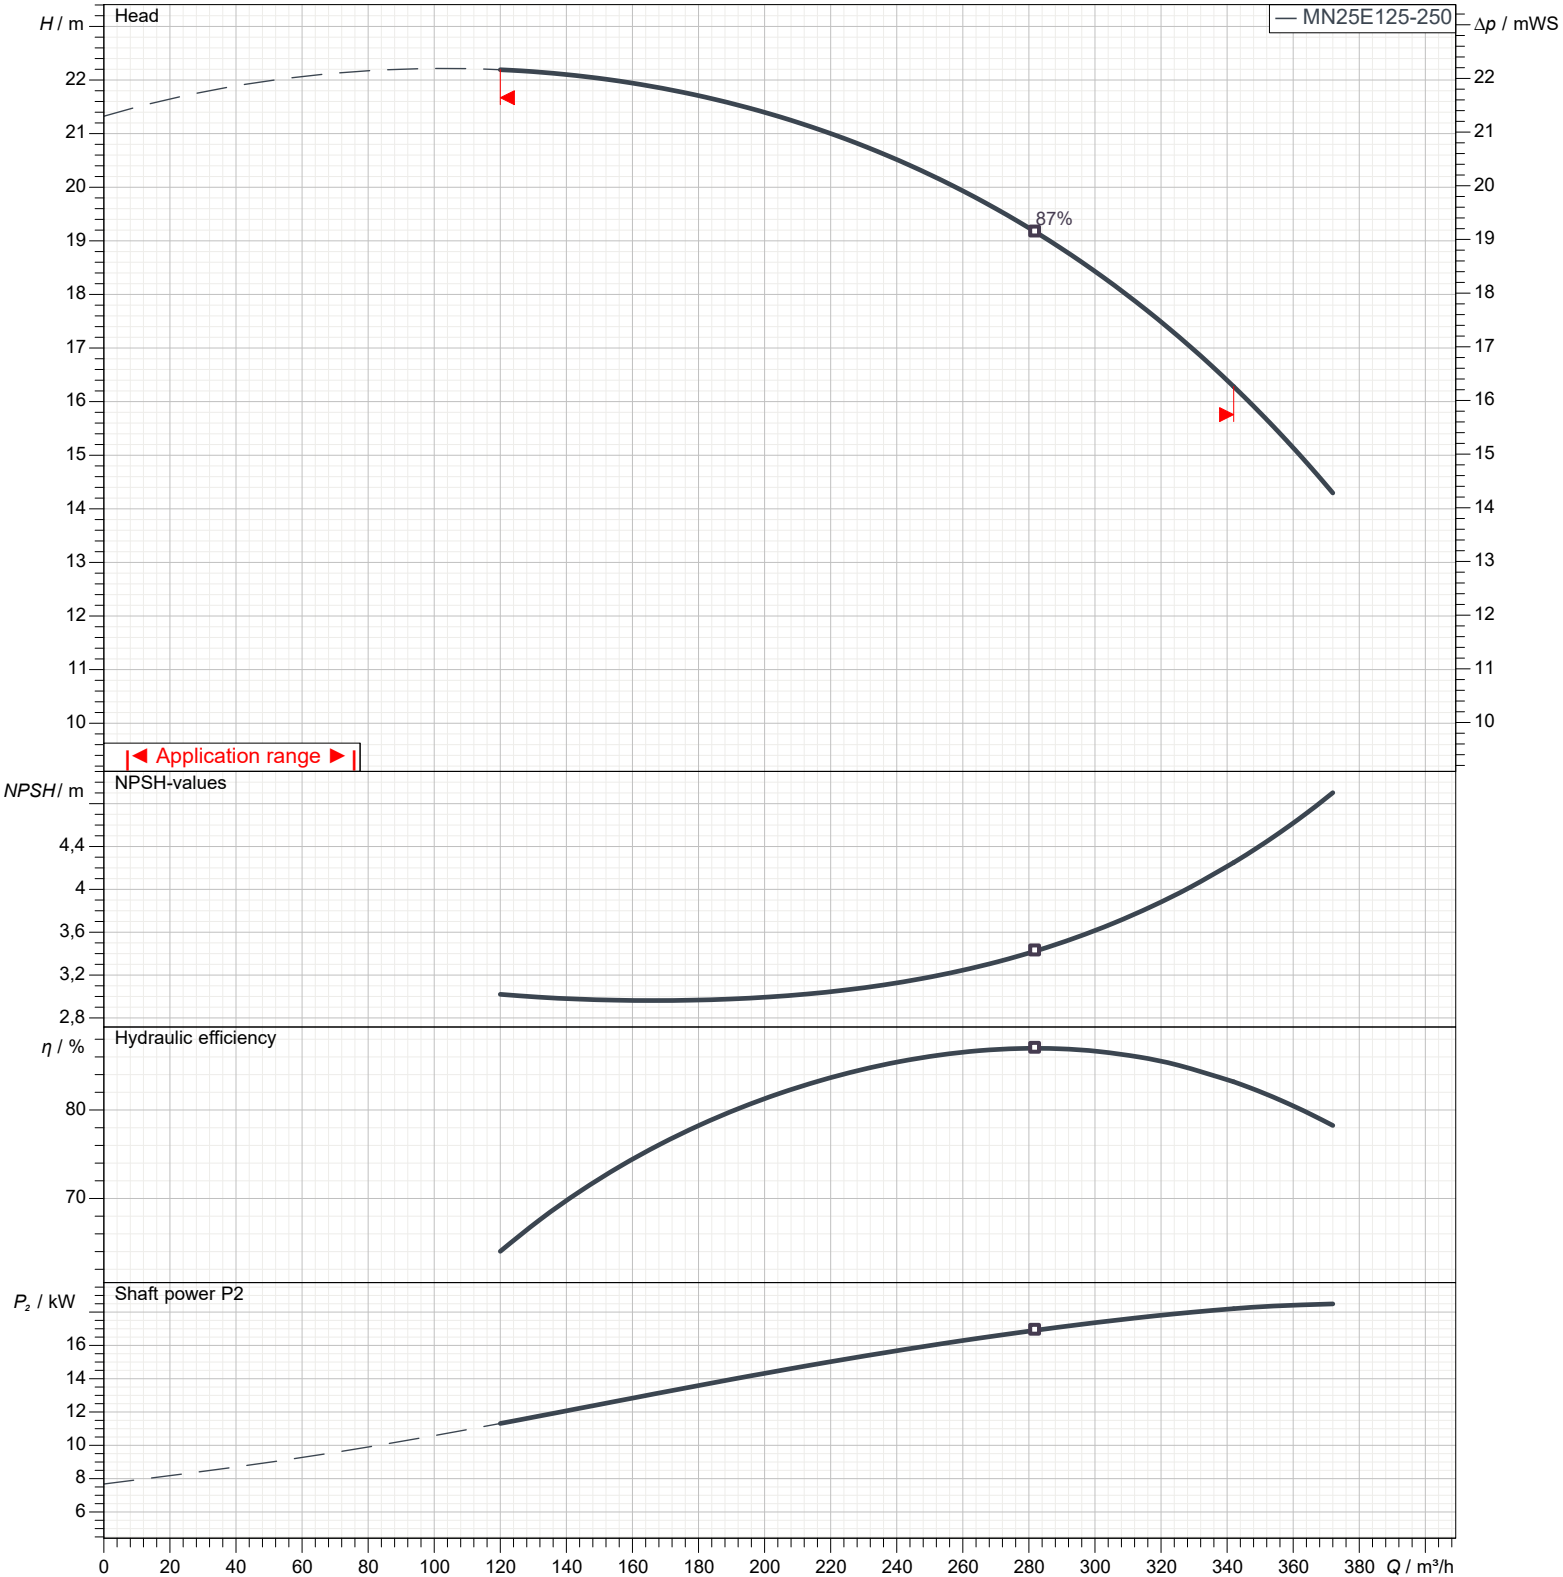

Types of installation

MN25E125-250-4P-50-TM-SS



Total weight		283 kg		Dimensions in mm	
a	140	h2	355		
A	279	K	15		
AB	350	L	472		
b	80	m1	160		
B	241	m2	120		
BB	315	n1	400		
C	580	n2	315		
D	280	s1	19		
Da1	285	x	8		
Da2	240	y	8		
Da3	22				
Dm1	250				
Dm2	210				
Dm3	18				
DNa	150				
DNm	125				
E	121				
G1	220				
G2	261				
H	180				
h1	250				