


Product description

MN30E80-315-4P-50-TM-SS

Pos.no	Description	Item no	Qty.	UP / €	TP / €
1	Close-coupled electric pump according to EN 733 (DIN 24255)				
2	Centrifugal pump: MN30E80-315-4P-50-TM-SS		1	Price on req.	Price on req.
3	<p>Pump bodies</p> <p>Close-coupled electric pumps in compliance with EN 733 - DIN 24255 standards coupled to IEC standard electric motors through rigid coupling.</p> <p>Duty point</p> <p>Flow : / Head :</p> <p>Pump operating data</p> <p>Impeller diameter : 315 mm / Speed : 1.450 1/min</p> <p>Flow : / Head :</p> <p>Shaft power P2 : / Efficiency :</p> <p>Head (Q = 0) : 36,73 m</p> <p>Pump body : Cast iron</p> <p>Impeller : Stainless steel</p> <p>Wear ring : Cast iron</p> <p>Support : Cast iron</p> <p>Coupling : Cast iron</p> <p>Shaft : Stainless steel</p> <p>Max. solid contents : 40 g/m³</p> <p>Max. water temperature : 90 °C</p> <p>Max. running time with Q=0 : 2 min</p>				
4	Motor: IEC 30 - 4		1		
5	<p>Electric motor</p> <p>Three-phase IE3 asynchronous squirrel cage motor.</p> <p>Casing : Cast iron</p> <p>Protection : IP 55</p> <p>Insulation class : F</p> <p>Number of startings : max 14</p> <p>Max environment temperature : 40 °C</p> <p>Max altimetric level : 1000 m</p> <p>Weight : 209 kg</p> <p>Frequency : 50 Hz</p> <p>N. poles : 4</p> <p>P2 : 22 kW</p> <p>U : 400 V</p> <p>In 1/1 : 40,2 A</p> <p>EFF : 93 %</p> <p>CosPhi : 0,85</p>				
6	Shaft seal: Mechanical seal		1		
7	<p>Cover : Cast iron</p> <p>Spacer : Stainless steel</p> <p>Seal face : Graphite</p> <p>Seat : Ceramic</p> <p>Seal ring : NBR</p> <p>Spring : AISI 304 stainless steel</p>				

Technical data

MN30E80-315-4P-50-TM-SS

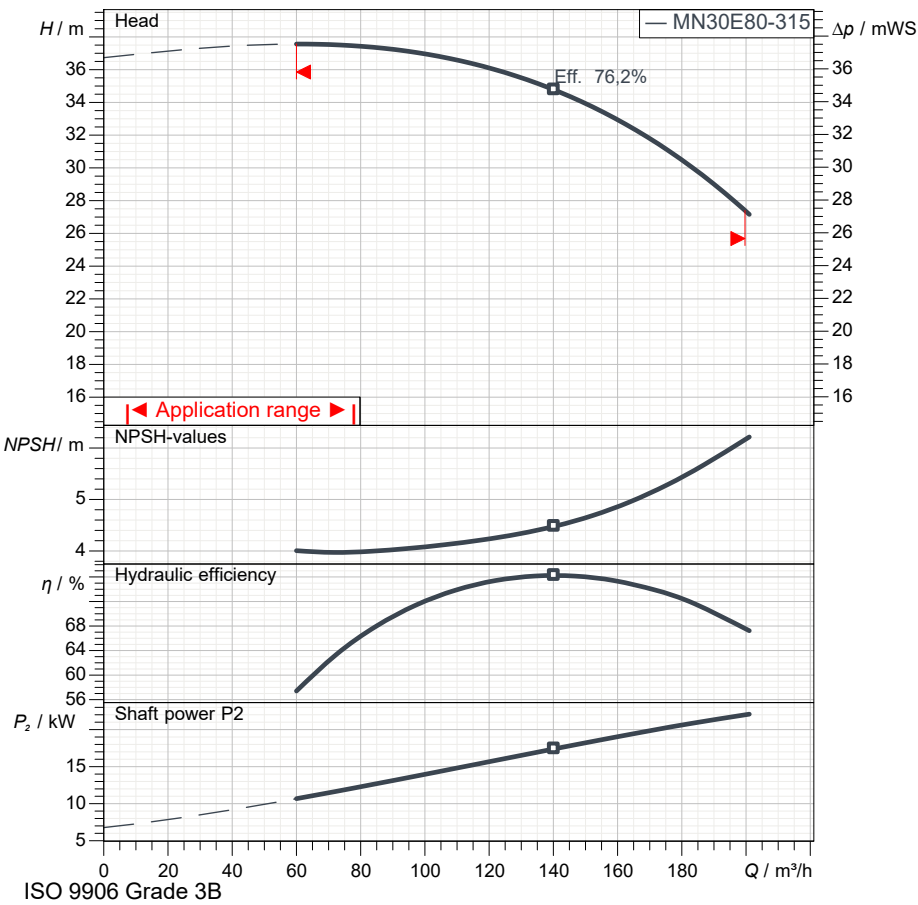

Operating data specification	
Capacity	
Head	
Fluid	Pure water
Type of installation	<Single head pump>

Pump operating data	
Design	MN30E80-315-4P-50-TM-SS
Impeller \varnothing	315 mm
Speed	1.450 1/min
Flow	
Head	
Shaft power P_2	
Efficiency	
Head ($Q=0$)	36,7 m
Non return valve loss	

Electric motor technical data	
Design	IEC 30 - 4
Rated power	22 kW
Frequency	50 Hz
Number of poles	4
Nominal speed	1.450 1/min
Rated voltage	3~ 400 V
Starting mode	Direct starting
Rated current	40,2 A
Insulation class	F
Degree of protection	IP 55

Use limits	
Max N° startings/hour	14
Max. running time with $Q=0$	2 min
Max. solids contents	40 g/m^3
Max. pumped liquid temperature	90 °C
Maximum density	998 kg/m^3
Maximum viscosity	1 mm^2/s

Materials	
Pump body	Cast iron
Impeller	Stainless steel
Wear ring	Cast iron
Support	Cast iron
Coupling	Cast iron
Shaft	Stainless steel

Shaft seal	
Cover	Cast iron
Spacer	Stainless steel
Seal face	Graphite
Seat	Ceramic
Seal ring	NBR
Spring	AISI 304 stainless steel




Dimensions in mm				Total weight 315 kg			
a	125	Da1	220	E	121	m1	160
A	279	Da2	180	G1	217	m2	120
AB	350	Da3	18	G2	238	n1	400
b	80	Dm1	200	H	180	n2	315
B	279	Dm2	160	h1	250	s1	19
BB	350	Dm3	18	h2	315	x	8
C	620	DNa	100	K	15	y	8
D	280	DNrr	80	L	457		

Performance curves

MN30E80-315-4P-50-TM-SS

Performances				
Speed		1.450 1/min	Density	998 kg/m ³
Flow	Min.	60 m ³ /h	Viscosity	1 mm ² /s
	Max.	201 m ³ /h		
Efficiency	Max.	140 m ³ /h	Temperature	20 °C
				Tolerances

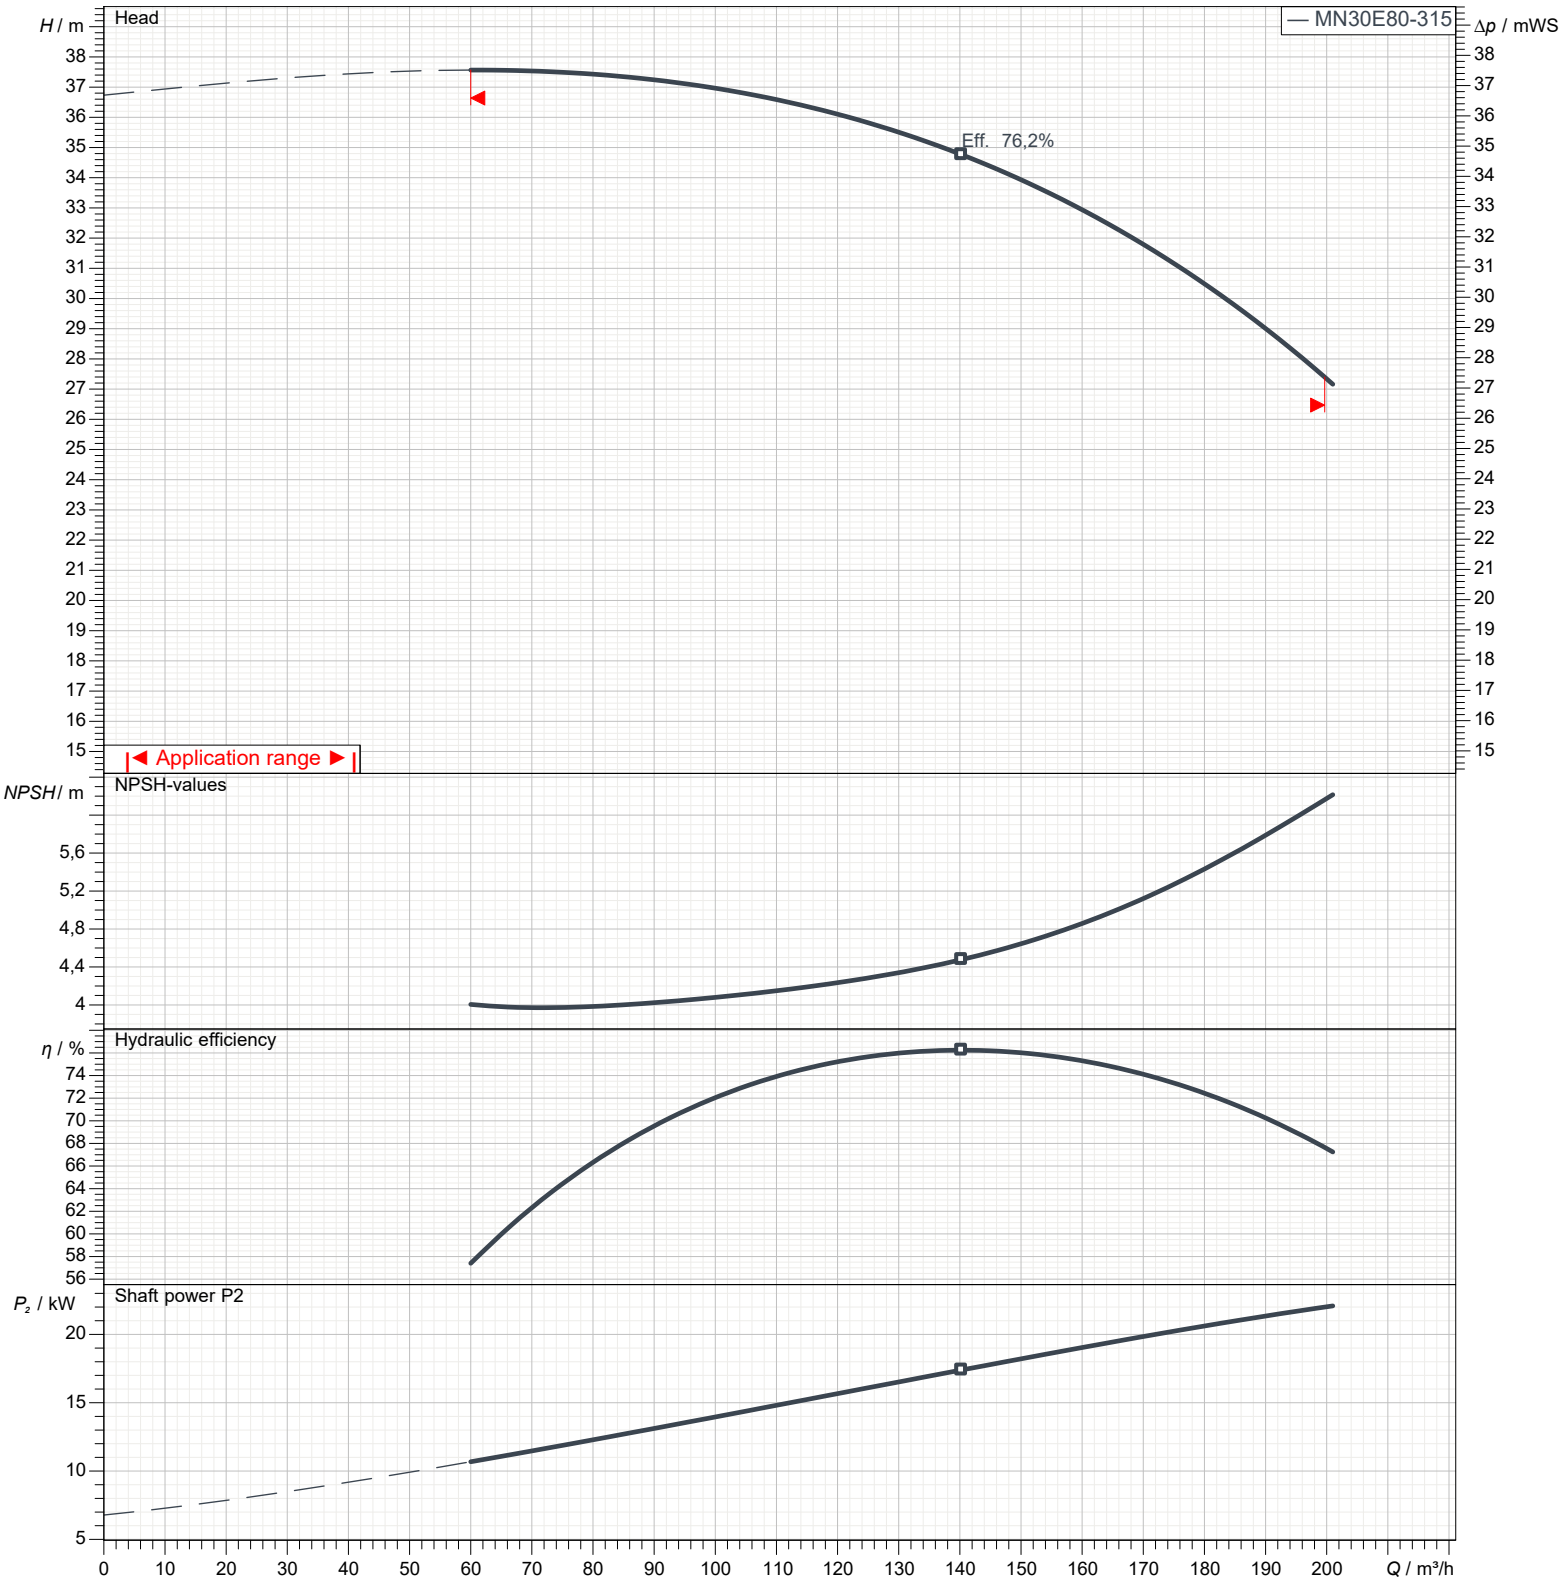

Types of installation

MN30E80-315-4P-50-TM-SS



Total weight		315 kg		Dimensions in mm	
a	125	h2	315		
A	279	K	15		
AB	350	L	457		
b	80	m1	160		
B	279	m2	120		
BB	350	n1	400		
C	620	n2	315		
D	280	s1	19		
Da1	220	x	8		
Da2	180	y	8		
Da3	18				
Dm1	200				
Dm2	160				
Dm3	18				
DNa	100				
DNm	80				
E	121				
G1	217				
G2	238				
H	180				
h1	250				