

## DATA SHEET

Company		Date	24/02/2023
Project		Item	
		Ref No.	

### SNDS 200-400-200

Horizontal, double suction, single stage, axially split volute casing pump

#### Operating Point Data

---

Capacity	:	Power at Duty Point	:
Head	:	Frequency	: 50 Hz
Efficiency (%)	:	Voltage	: 400 V
Impeller Diameter	: 425 mm	Motor Power	: 200.00 kW
NPSHr	:	Nominal Speed	: 1485 rpm
Shut Off Head	: 66.2 m		

#### Liquid Data

---

Liquid	: Water	Density	: 998.30 kg/m <sup>3</sup>
Temperature	: 20 °C	Viscosity	: 1.005 mm <sup>2</sup> /s

#### Pump Data

---

Design	: Double suction, Single stage	Type of Coupling	: Standard
Installation	: Horizontal	Impeller Type	: Double Suction
Suction Flange	: EN 1092 PN 16-DN 250	Type of Bearing	: Grease Lubricated Bearing
Discharge Flange	: EN 1092 PN 16-DN 200	Type of Shaft Sealing	: Soft Packing
Direction Of Rotation	: Clockwise from the drive end		

#### Materials

---

Volute Casing	0.6025 / GG25 / EN-GJL-250 / ASTM A48 Class 40B
Impeller	0.6025 / GG25 / EN-GJL-250 / ASTM A48 Class 40B
Shaft	1.4021 / X20Cr13 / ASTM A276 Type 420
Bearing Housing	0.6025 / GG25 / EN-GJL-250 / ASTM A48 Class 40B
Casing Wear Ring	2.1050.01 / G-CuSn10 / ASTM B427 C90700
Shaft Protecting Sleeve	1.4021 / X20Cr13 / ASTM A276 Type 420

### Operating Point Data


Company		Date	24/02/2023
Project		Item	
		Ref No.	

### SNDS 200-400-200

Horizontal, double suction, single stage, axially split volute casing pump

Capacity:  
 Head:  
 Efficiency (%):  
 Power at Duty Point:  
 Viscosity: 1.005 mm<sup>2</sup>/s

NPSHr:  
 Motor Power: 200.00 kW  
 Nominal Speed: 1485 rpm  
 Frequency: 50 Hz  
 Density: 998.30 kg/m<sup>3</sup>

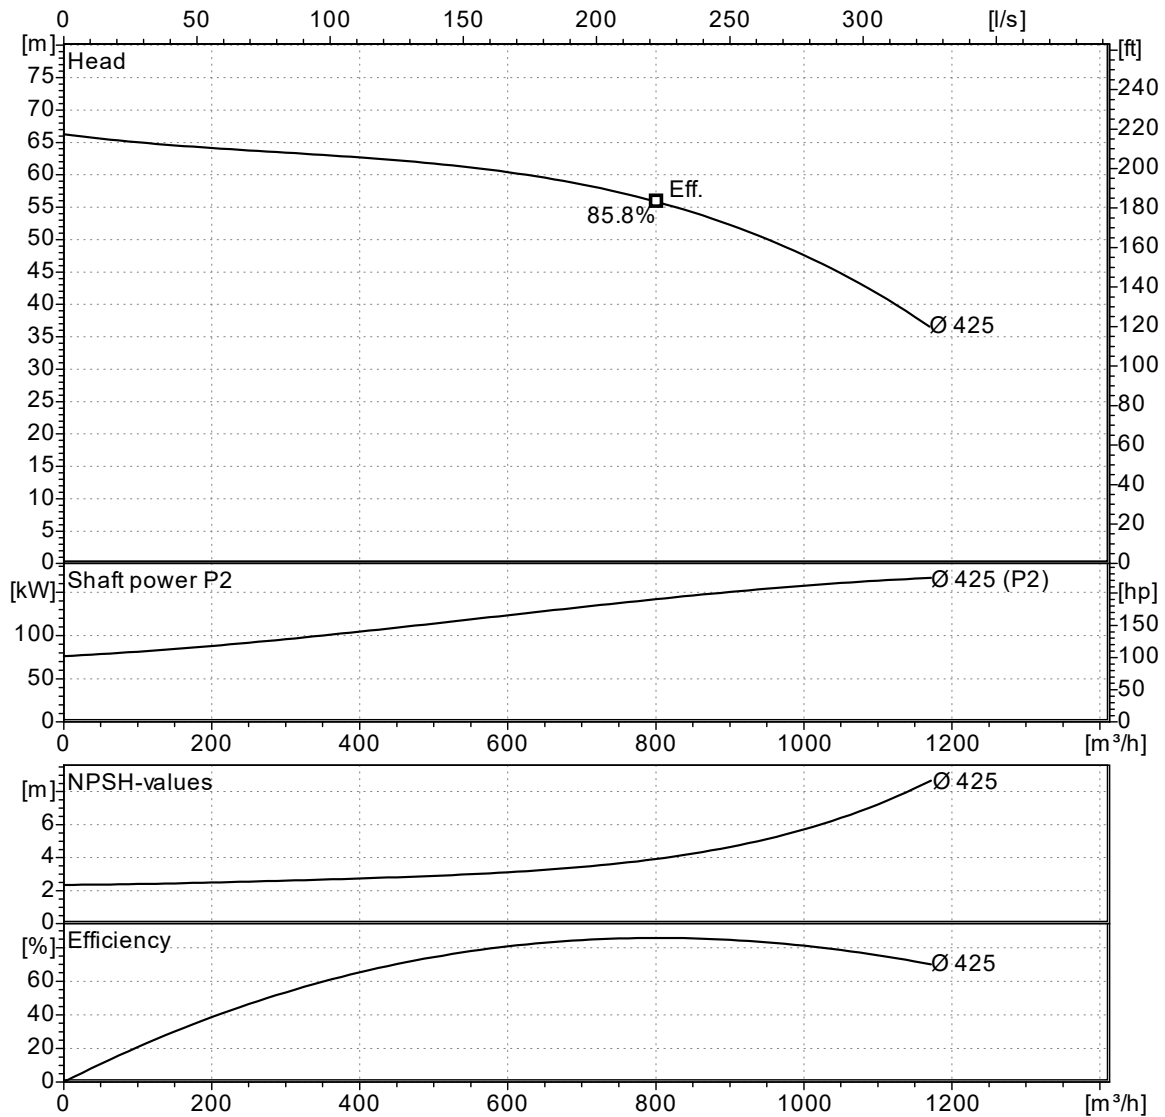

Curves compatible with ISO 9906:2012 Gr 3B

NPSHa > NPSHr + 1m

Note : The motor power is not sufficient for dotted area.

Company		Date	24/02/2023
Project		Item	
		Ref No.	

**SNDS 200-400-200**

Horizontal, double suction, single stage, axially split volute casing pump

**Pump Dimensions**



Name	Value
a1	500
a2	450
d	65
DNb	200
DNe	250
h1	500
h2	240
h3	360
l	130
l1	645
l2	500
l3	1145
m1	360
m2	420
n1	540
n2	640
s	22
W	575 kg

Note : l1 and l2 replaced each other since pump shaft rotates counter-clockw ise.

**Flange Dimensions**



Suction Flange	Discharge Flange
AB = 250	AB = 200
Df = 405	Df = 340
k = 355	k = 295
n = 12	n = 12
s = 28	s = 23

" n " number of holes

Company		Date	24/02/2023
Project		Item	
		Ref No.	

**SNDS 200-400-200**

Horizontal, double suction, single stage, axially split volute casing pump

**Motor Data**

---

Efficiency Level :  
 Motor type : Three-Phase Asynchronous Motor  
 Motor Power : 200.0 kW  
 Rated Speed : 1450 rpm  
 Voltage : 400 V  
 Rated Current : 0.00 A  
 Frequency : 50 Hz  
 Motor Phase : 3  
 Service Factor : 1.15  
 Insulation Class : F  
 Degree of Protection : IP 55  
 Efficiency : - %  
 Power factor : 0.00