

DATA SHEET

Company		Date	08/02/2023
Project		Item	
		Ref No.	

SNSP 125-200-7.5

Single stage, radially split, volute casing type conforming to EN 733 and EU 547/2012

Operating Point Data

Capacity	:	Power at Duty Point	:
Head	:	Frequency	: 50 Hz
Efficiency (%)	:	Voltage	: 400 V
Impeller Diameter	: 202 mm	Motor Power	: 7.50 kW
NPSHr	:	Nominal Speed	: 1450 rpm
Shut Off Head	: 11.5 m		

Liquid Data

Liquid	: Water	Density	: 998.30 kg/m ³
Temperature	: 20 °C	Viscosity	: 1.005 cSt

Pump Data

Design	: Single Stage, End Suction	Type of Coupling	: Standard
Installation	: Horizontal	Direction Of Rotation	: Clockwise from the drive end
Suction Flange	: EN 1092 PN 16-DN 150	Impeller Type	: Radial impeller
Discharge Flange	: EN 1092 PN 16-DN 125	Type of Bearing	: Closed Type Bearing
Pressure rating	: PN10	Type of Shaft Sealing	: Soft Packing

Minimum Efficiency Index (MEI) >= 0,4

Materials

Volute Casing	0.6025 / GG25 / EN-GJL-250 / ASTM A48 Class 40B
Casing Cover	0.6025 / GG25 / EN-GJL-250 / ASTM A48 Class 40B
Impeller	0.6025 / GG25 / EN-GJL-250 / ASTM A48 Class 40B
Shaft	1.0503 / C45 / AISI 1045
Bearing Housing	0.6025 / GG25 / EN-GJL-250 / ASTM A48 Class 40B

Operating Point Data


Company		Date	08/02/2023
Project		Item	
		Ref No.	

SNSP 125-200-7.5

Single stage, radially split, volute casing type conforming to EN 733 and EU 547/2012

Capacity:
Head:
Efficiency (%):
Power at Duty Point:
Viscosity: 1.005 cSt

NPSHr:
Motor Power: 7.50 kW
Nominal Speed: 1450 rpm
Frequency: 50 Hz
Density: 998.30 kg/m³

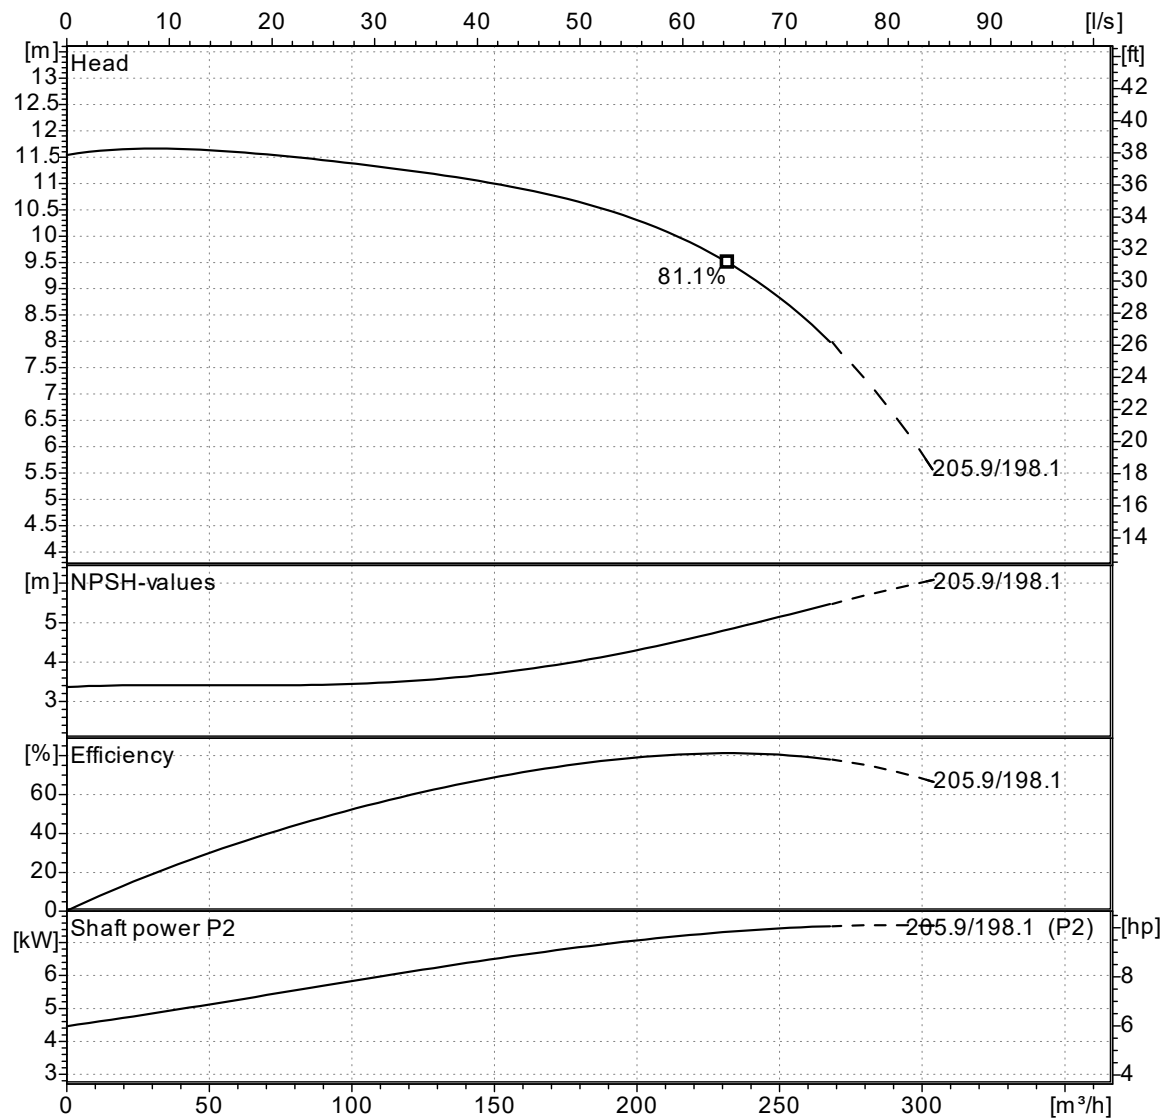

Curves compatible with ISO 9906:2012 Gr 3B

NPSHa > NPSHr + 1m



Note : The motor power is not sufficient for dotted area.

Company		Date	08/02/2023
Project		Item	
		Ref No.	

SNSP 125-200-7.5

Single stage, radially split, volute casing type conforming to EN 733 and EU 547/2012


Pump Dimensions

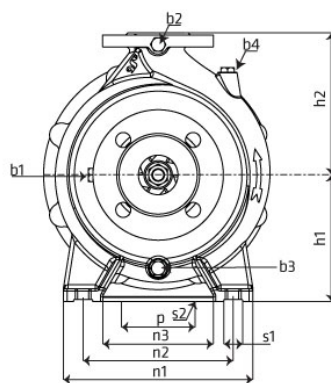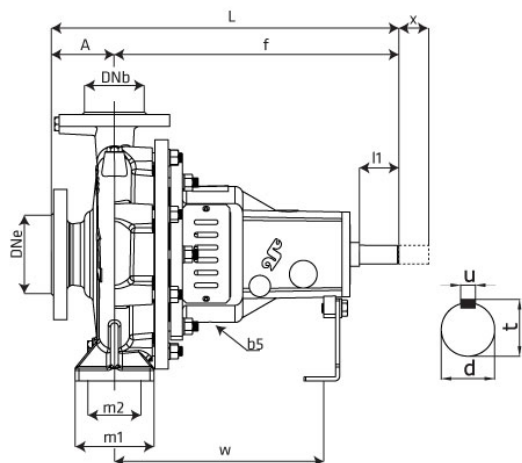

Name	Value
A	140
b1	1/4"
b2	1/4"
b3	1/2"
b4	1/2"
b5	3/8"
d	32
DBe	150
DNb	125
f	470
h1	250
h2	315
L	610
l1	80
m1	160
m2	120
n1	400
n2	315
n3	240
p	110
s1	19
s2	14
t	35
u	10
w	340
W	90 kg
x	140

Note : b1, b2 and b4 holes are not drilled in ductile iron, cast steel and stainless steel volute casings.

Flange Dimensions

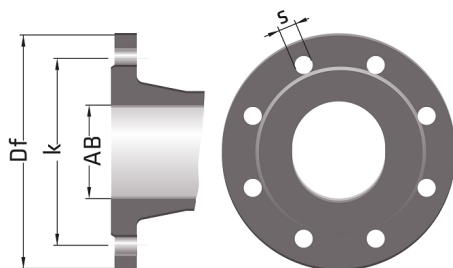

Suction Flange

AB = 150
Df = 285
k = 240
n = 8
s = 23

Discharge Flange

AB = 125
Df = 250
k = 210
n = 8
s = 19

" n " number of holes

Company		Date	08/02/2023
Project		Item	
		Ref No.	

SNSP 125-200-7.5

Single stage, radially split, volute casing type conforming to EN 733 and EU 547/2012

Motor Data

Efficiency Level	:	
Motor type	:	Three-Phase Asynchronous Motor
Motor Power	:	7.5 kW
Rated Speed	:	1450 rpm
Voltage	:	400 V
Rated Current	:	15.00 A
Frequency	:	50 Hz
Motor Phase	:	3
Service Factor	:	1.15
Insulation Class	:	F
Degree of Protection	:	IP 55
Efficiency	:	- %
Power factor	:	0.00