

DATA SHEET

Company		Date	08/02/2023
Project		Item	
		Ref No.	

SNSP 250-315-110

Single stage, radially split, volute casing type conforming to EU 547/2012

Operating Point Data

Capacity	:	Power at Duty Point	:
Head	:	Frequency	: 50 Hz
Efficiency (%)	:	Voltage	: 400 V
Impeller Diameter	: 338 mm	Motor Power	: 110.00 kW
NPSHr	:	Nominal Speed	: 1480 rpm
Shut Off Head	: 35.4 m		

Liquid Data

Liquid	: Water	Density	: 998.30 kg/m ³
Temperature	: 20 °C	Viscosity	: 1.005 cSt

Pump Data

Design	: Single Stage, End Suction	Type of Coupling	: Standard
Installation	: Horizontal	Direction Of Rotation	: Clockwise from the drive end
Suction Flange	: EN 1092 PN 16-DN 250	Impeller Type	: Radial impeller
Discharge Flange	: EN 1092 PN 16-DN 250	Type of Bearing	: Closed Type Bearing
Pressure rating	: PN10	Type of Shaft Sealing	: Soft Packing

Minimum Efficiency Index (MEI) >= 0,4

Materials

Volute Casing	0.6025 / GG25 / EN-GJL-250 / ASTM A48 Class 40B
Casing Cover	0.6025 / GG25 / EN-GJL-250 / ASTM A48 Class 40B
Impeller	0.6025 / GG25 / EN-GJL-250 / ASTM A48 Class 40B
Shaft	1.0503 / C45 / AISI 1045
Bearing Housing	0.6025 / GG25 / EN-GJL-250 / ASTM A48 Class 40B

Operating Point Data


Company		Date	08/02/2023
Project		Item	
		Ref No.	

SNSP 250-315-110

Single stage, radially split, volute casing type conforming to EU 547/2012

Capacity:
Head:
Efficiency (%):
Power at Duty Point:
Viscosity: 1.005 cSt

NPSHr:
Motor Power: 110.00 kW
Nominal Speed: 1480 rpm
Frequency: 50 Hz
Density: 998.30 kg/m³


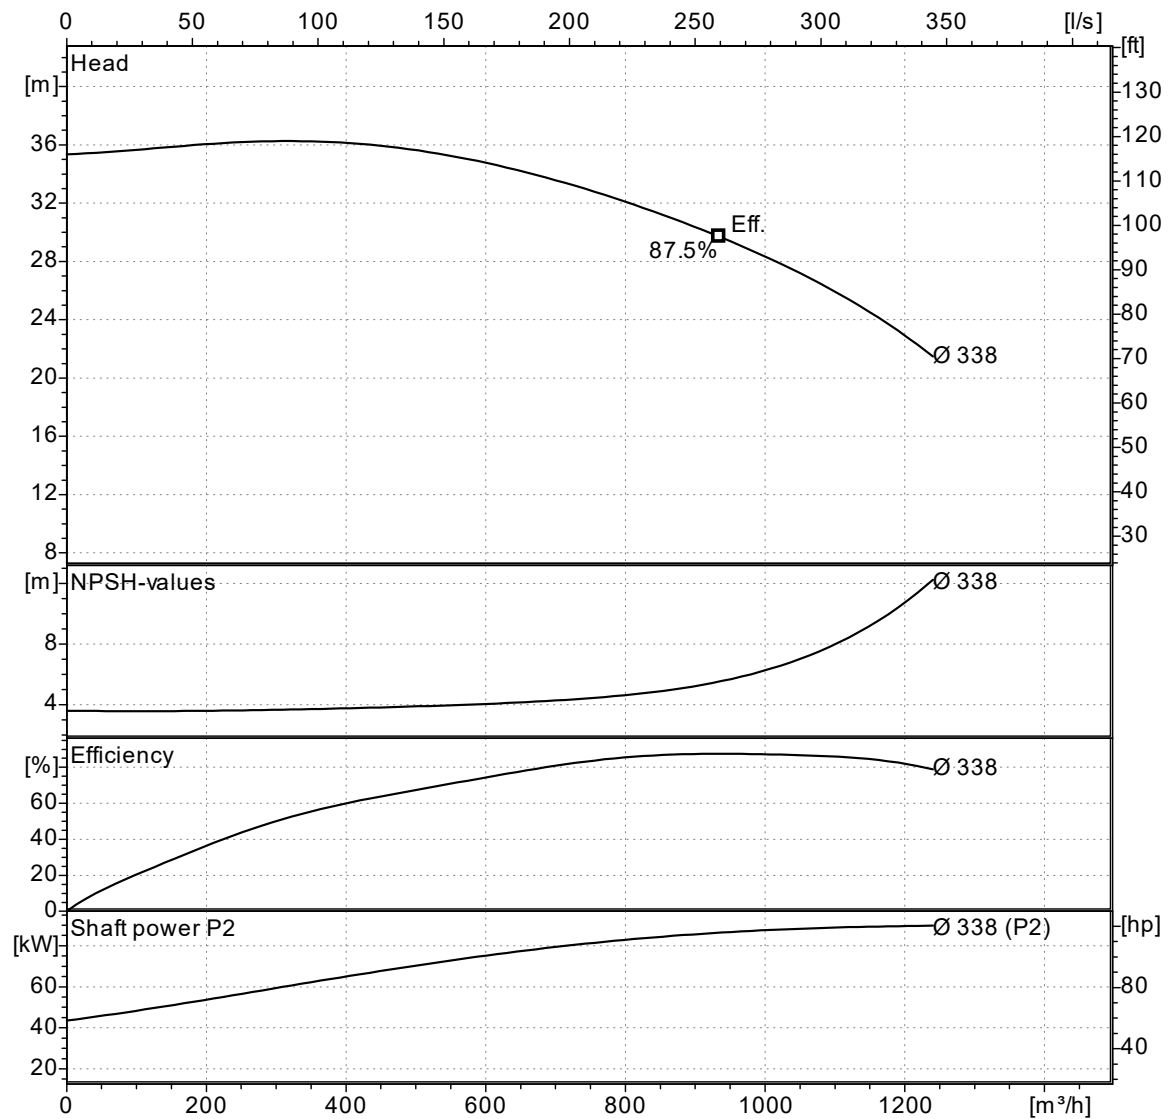


Company		Date	08/02/2023
Project		Item	
		Ref No.	

SNSP 250-315-110

Single stage, radially split, volute casing type conforming to EU 547/2012


Pump Dimensions

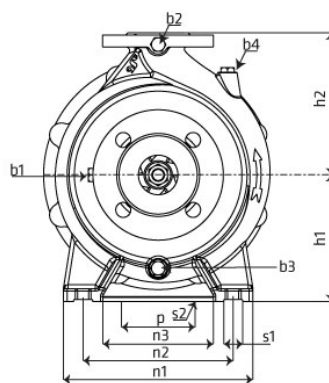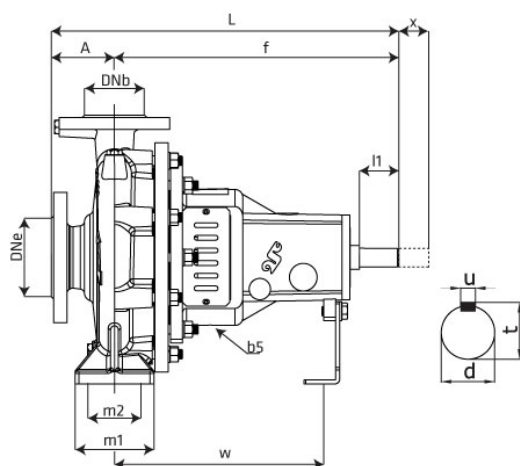

Name	Value
A	250
b1	1/4"
b2	1/4"
b3	3/4"
b4	3/4"
b5	1/2"
d	55
DBe	250
DNb	250
f	750
h1	355
h2	525
L	1000
l1	110
m1	300
m2	240
n1	660
n2	550
n3	400
p	110
s1	27
s2	14
t	59
u	16
w	578
W	371 kg
x	250

Note : b1, b2 and b4 holes are not drilled in ductile iron, cast steel and stainless steel volute casings.

Flange Dimensions

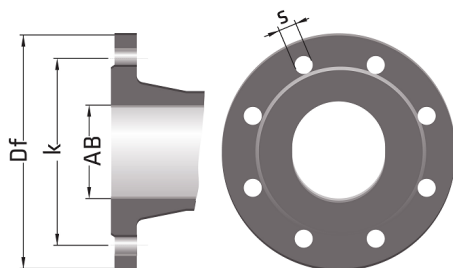

Suction Flange

AB = 250

Df = 405

k = 355

n = 12

s = 28

Discharge Flange

AB = 250

Df = 405

k = 355

n = 12

s = 28

" n " number of holes

Company		Date	08/02/2023
Project		Item	
		Ref No.	

SNSP 250-315-110

Single stage, radially split, volute casing type conforming to EU 547/2012

Motor Data

Efficiency Level	:	
Motor type	:	Three-Phase Asynchronous Motor
Motor Power	:	110.0 kW
Rated Speed	:	1450 rpm
Voltage	:	400 V
Rated Current	:	0.00 A
Frequency	:	50 Hz
Motor Phase	:	3
Service Factor	:	1.15
Insulation Class	:	F
Degree of Protection	:	IP 55
Efficiency	:	- %
Power factor	:	0.00